



Features


- Whirl disc creates centrifugal action for maximum water and particulate removal
- Dense pack element design ensures long life with minimal pressure drop
- Tie-rod construction for maximum stability
- 20 micron element standard (10 and 3 micron elements available)
- Manual drain standard; float drain or impulse drains available

Operating Specifications

- Bowl Capacity:** 5 oz.
Maximum Pressure Ratings:
 - Aluminum Bowl: 250 PSIG
 - Polycarbonate Bowl: 150 PSIG
Temperature Ratings:
 - Aluminum Bowl: 0-200°F
 - Polycarbonate Bowl: 0-120°F

Replacement Parts


- Polycarbonate Bowl Kit:** 22520
Aluminum Bowl Kit: 22537
Aluminum Bowl Kit w/ Sight Level: 22521-P / 22521-T
Elements:
 - 20 Micron: 22205
 - 10 Micron: 22033
 - 3 Micron: 22032




Materials of Construction

- Head:** Machined Aluminum
Bowl: Polycarbonate or Machined Aluminum
Whirl Disc: Acetal
Stud: Unanodized Assembly: Plated Steel
 Anodized Assembly: Brass
Base Nut Assembly: Machined Aluminum
Baffle Plate: Acetal
Element: Phenolic Impregnated Cellulose
Seals: Buna-N (fluorocarbon available)
Drain:
 - Manual: Brass and Plated Steel
 - Float: Anodized Aluminum w/ Acetal and Stainless Steel Float mechanism
 - Impulse: Machined Aluminum, Brass, and Buna-N (fluorocarbon available)
Bowl Guard: Stainless Steel
Sight Level: Trogamid

Flow Characteristics

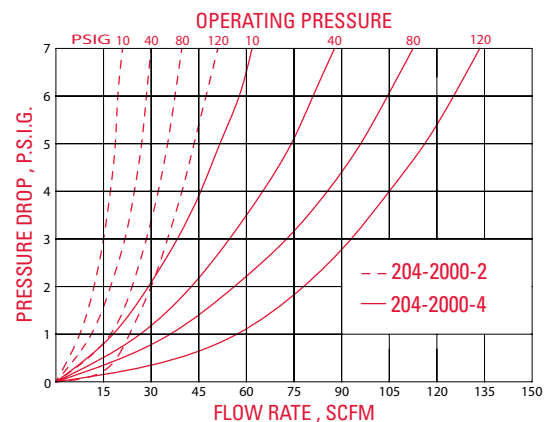

Dimensions

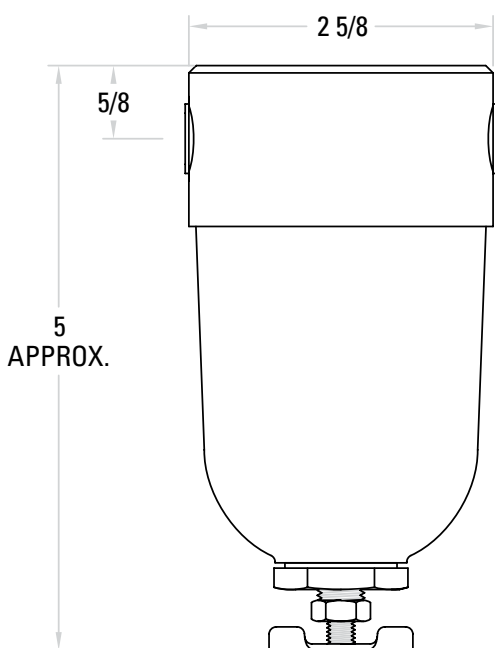

Ordering Information

204-2000-2

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Level	3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

Pipe Size	
1/4"	2
3/8"	3
1/2"	4

OPTIONS

Anodizing	
No Anodizing	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual (Standard)	Blank
Impulse	D
Float	F

Seals	
Buna-N	Blank
Fluorocarbon	V

Mounting Hole	
Two 1/4-20 mounting holes on top surface	MH
1/4 NPT mounting hole on side	MS