



## Features

- Removes liquid and sub-micron solids
- 0.3 micron element removes 99.97% of all moisture and dirt from the air
- 0.01 micron element removes 99.995% of all moisture and dirt from the air
- Manual drain standard; float or impulse drain available
- Pressure drop indicator available to show when element needs to be changed
- High flow with 64 oz. bowl capacity
- Standard green anodized filter housing (other colors available)

## Operating Specifications

- Bowl Capacity:** 64 oz.
- Maximum Pressure Ratings:**
- Aluminum Bowl: 250 PSIG
  - Polycarbonate Bowl: 150 PSIG
- Temperature Ratings:**
- Aluminum Bowl: 0-200°F
  - Polycarbonate Bowl: 0-120°F

## Materials of Construction

- Head, Bowl, Base & Stack:** Anodized Machined Aluminum
- Stud:** Brass
- Element:** Borosilicate Glass Fiber with Urethane End Caps
- Element Retainer:** Anodized Machined Aluminum
- Element Retainer Nut:** Nylon
- Base Nut:** Anodized Machined Aluminum
- Seals:** Buna-N (fluorocarbon available)
- Drain:**
- Manual: Brass and Plated Steel
  - Float: Acetal and Stainless Steel
  - Impulse: Machined Aluminum, Brass, and Buna-N (fluorocarbon available)
- Sight Level:** Trogamid
- Pressure Drop Indicator:** Polyethylene, Phosphate Coated Steel Retaining Ring, Trogamid Dome



Manual Drain




Automatic Drain


## Accessories & Kits

- Seal Kit:** 26565
- Sight Levels:** 21537-T
- Pressure Drop Indicator Assembly:** 21542-T
- Pressure Drop Indicator Seal Kit:** 21543
- Elements: 0.3 Micron:** 26550 **0.01 Micron:** 26751
- Metal Bowl Kit:** 26558
- Metal Bowl Kit w/ Sight Levels:** 26559-T

## Flow Characteristics

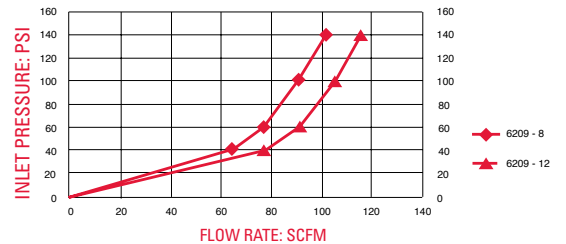

## Dimensions

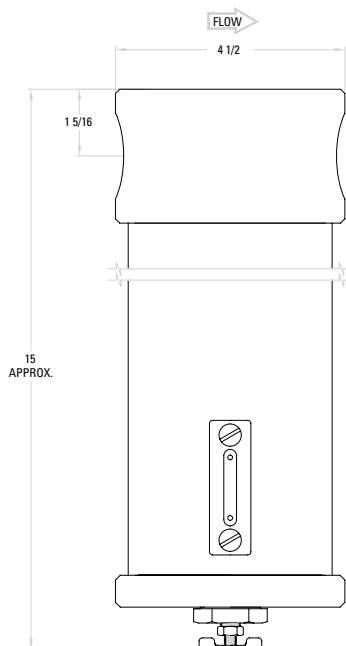

## Ordering Information

# 204-6209-8

Bowl Type	
Metal	2
Metal w/ Sight Level	3
Pressure Drop Indicator	
Without PDI	0
With PDI	8
Elements	
0.3 micron	9
0.01 micron	8

Pipe Size	
1"	8
1 1/4"	10
1 1/2"	12

### OPTIONS

Anodizing	
Green (Standard)	Blank
Blue	A1
Black	A2
Clear	A3
Red	A5
Yellow	A6
Gold	A7
Purple	A8
Drain	
Manual (Standard)	Blank
Impulse (External)	D
Float (Internal)	F
Seals	
Buna-N (Standard)	Blank
Fluorocarbon (Viton)	V
Mounting Hole	
Two 1/4-20 mounting holes on top surface	MH
1/4 NPT mounting hole on side	MS