



## Features

- High flow with minimal pressure drop
- 1.5PSI  $\Delta P$  at rated flow
- Available with manual or float drain

## Operating Specifications

**Port Sizes:** 1-1/4", 1-1/2", 2"  
**Thread Styles:** NPT, BSPT, BSPP  
**Flow Capacity:** 400 & 700 SCFM @ 100 PSI  
**Maximum Temperature:** 175° F  
**Maximum Pressure:** 200 PSIG  
**Filter Capacity:** 0.01 micron  
**Differential Pressure:** <1.5 PSI  $\Delta P$  at Rated Flow

## Accessories & Kits

**Bowl O-Ring (400/700):** 27001  
**Float Drain:** 20-404  
**Differential Indicator (400/700):** 27002  
**Manual Drain:** 27003


## Materials of Construction

**Housing:** Aluminum  
**Stud:** Stainless Steel  
**Indicator:** Nylon  
**Seals:** Buna-N  
**Elements:** Aluminum and Stainless Steel  
**Assembly Screws:** Black Oxide Plated Steel  
**Drain (20-404):** Anodized Aluminum, Acetal, and Stainless Steel

## Replacement Elements:

**7208:** 27004  
**8208:** 28001

## Dimensions

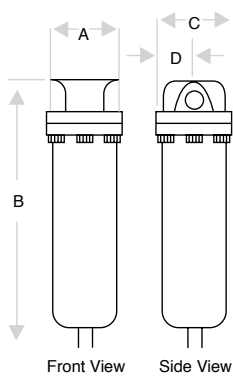

### Metal Bowl, Manual Drain

**A: 7.8 B: 27.5 C: 7.8 D: 3.9**

### Metal Bowl, Float Drain

**A: 7.8 B: 32.0 C: 7.8 D: 3.9**

### Metal Bowl, Float Drain w/ Indicator

**A: 7.8 B: 33.0 C: 7.8 D: 3.9**

## Ordering Information

# 201-7208-10F

