



Features

- Excellent water removal characteristics
- Heavy duty machined aluminum for rugged applications
- Dense pack element design ensures long life with maximum particulate removal
- Now available with internal float drain or external impulse drain
- High flow with large bowl capacity (21 oz.)
- 20 micron elements standard
- 20 micron elements standard (100, 10 and 3 available)

Operating Specifications

- Bowl Capacity:** 21 oz.
- Maximum Pressure Ratings:**
- Aluminum Bowl: 250 PSIG
 - Polycarbonate Bowl: 150 PSIG
- Temperature Ratings:**
- Aluminum Bowl: 0-200°F
 - Polycarbonate Bowl: 0-120°F

Replacement Parts

- Polycarbonate Bowl Kit:** 25557
- Aluminum Bowl Kit:** 25558
- Metal Bowl w/ Sight Level Kit (Trogamid):** 25559-T
- Elements:**
- 100 Micron: 25086
 - 20 Micron: 25039
 - 10 Micron: 25029
 - 3 Micron: 25028



Manual Drain




Automatic Drain


Materials of Construction

- Head:** Machined Aluminum
- Bowl:** Polycarbonate or Machined Aluminum
- Base (polycarbonate bowl only):** Aluminum
- Whirl Disc:** Acetal
- Stud:** Plated Steel
- Adaptor, Spacer, Base Nut & Baffle Plate:** Aluminum
- Element:** Phenolic Impregnated Cellulose
- Seals:** Buna-N (fluorocarbon available)
- Drain:**
- Manual: Brass and Plated Steel
 - Float: Acetal and Stainless Steel
 - Impulse: Machined Aluminum, Brass, and Buna-N (fluorocarbon available)
- Bowl Guard:** Stainless Steel
- Sight Level:** Trogamid

Flow Characteristics

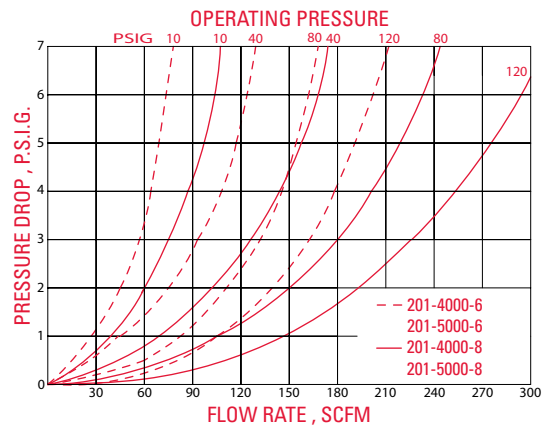

Dimensions

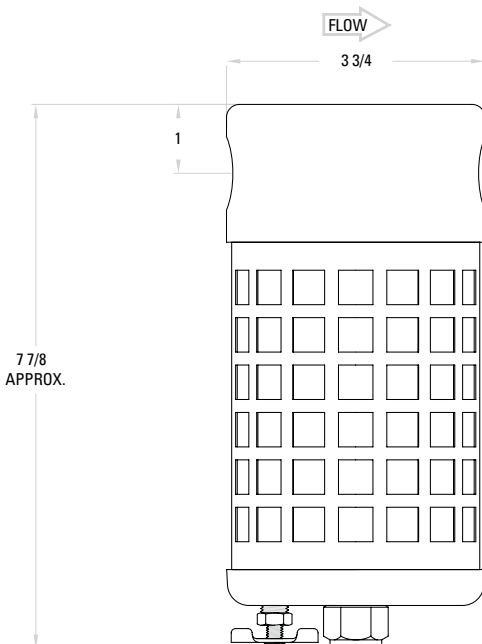

Ordering Information

201-5000-6

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Level	3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2
100 Micron	3

Pipe Size	
1/2"	4
3/4"	6
1"	8

OPTIONS

Anodizing	
No Anodizing	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8
Drain	
Manual (Standard)	Blank
Float (Internal)	F
Impulse (External)	D
Mounting Hole	
Two 1/4-20 mounting holes on top surface	MH
1/4 NPT mounting hole on side	MS