



Features

- Excellent water removal characteristics
- High flow with large bowl capacity (32 oz)
- Heavy duty machined aluminum for rugged applications
- Dense pack element design ensures long life with minimal pressure drop
- Now available with internal float drain or external impulse drain
- 20 micron elements standard (100 and 3 micron elements available)

Operating Specifications

- Bowl Capacity:** 32 oz.
Maximum Pressure Ratings:
 - Aluminum Bowl: 250 PSIG
 - Polycarbonate Bowl: 150 PSIG
Temperature Ratings:
 - Aluminum Bowl: 0-200°F
 - Polycarbonate Bowl: 0-120°F

Replacement Parts

- Polycarbonate Bowl Kit:** 24557
Aluminum Bowl Kit: 24558
Metal Bowl w/ Sight Level Kit (Trogamid): 24559-T
Elements:
 - 100 Micron: 24087
 - 20 Micron: 24015
 - 10 Micron: 24017
 - 3 Micron: 24013



Manual Drain




Automatic Drain


Materials of Construction

- Head:** Machined Aluminum
Bowl: Polycarbonate or Machined Aluminum
Base (polycarbonate bowl only): Aluminum
Whirl Disc: Acetal
Stud: Plated Steel
Adaptor, Spacer, Base Nut & Baffle Plate: Aluminum
Element: Phenolic Impregnated Cellulose
Seals: Buna-N (fluorocarbon available)
Drain: - Manual: Brass and Plated Steel
 - Float: Acetal and Stainless Steel
 - Impulse: Machined Aluminum, Brass, and Buna-N (fluorocarbon available)
Bowl Guard: Stainless Steel
Sight Level: Trogamid

Flow Characteristics

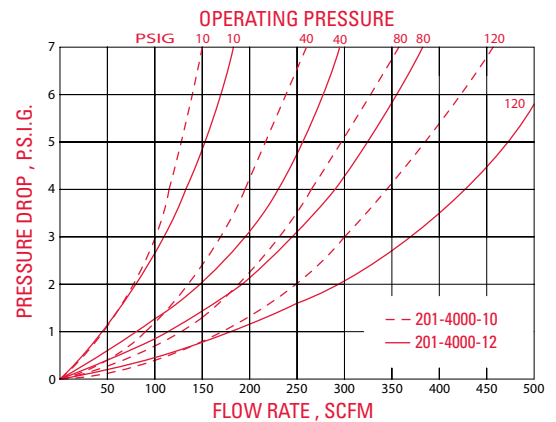

Dimensions

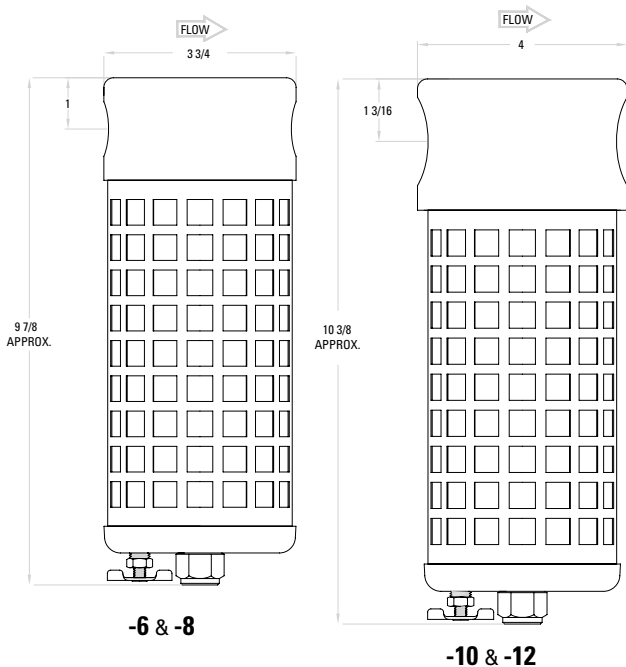

Ordering Information

201-4000-8

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Level	3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2
100 Micron	3

Pipe Size	
3/4"	6
1"	8
1 1/4"	10
1 1/2"	12

OPTIONS

Anodizing	
No Anodizing	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8
Drain	
Manual (Standard)	Blank
Impulse (External)	D
Float (Internal)	F
Mounting Hole	
Two 1/4-20 mounting holes on top surface	MH
1/4 NPT mounting hole on side	MS