



## Features

- High flow with minimal pressure drop
- 1.5PSI  $\Delta$ P at 1200 scfm
- Available with manual or float drain

## Operating Specifications

**Port Sizes:** 3"  
**Thread Styles:** NPT, BSPT, BSPP  
**Flow Capacity:** 1200 SCFM @ 100 PSI  
**Maximum Temperature:** 175° F  
**Maximum Pressure:** 200 PSIG  
**Filter Capacity:** 0.01 micron  
**Differential Pressure:** 1.5 PSI  $\Delta$ P at Rated Flow

## Materials of Construction

**Housing:** Aluminum  
**Stud:** Stainless Steel  
**Indicator:** Nylon  
**Seals:** Buna-N  
**Elements:** Aluminum and Stainless Steel  
**Assembly Screws:** Black Oxide Plated Steel  
**Drain (20-404):** Anodized Aluminum, Acetal and Stainless Steel

## Accessories & Kits

**Float Drain:** 20-404  
**Manual Drain:** 29002  
**Replacement Element:** 29003




Manual Drain



Automatic Drain

## Dimensions

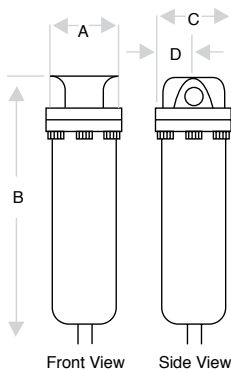

Front View Side View

**Metal Bowl, Manual Drain**  
**A: 8.0 B. 39.5 C. 8.0 D. 4.0**

**Metal Bowl, Float Drain**  
**A: 8.0 B. 45.0 C. 8.0 D. 4.0**

## Ordering Information

# 201-9208-24F

<b>Pressure Drop Indicator</b>		<b>Drain</b>	
Without PDI	0	Manual (Standard) Float	Blank F
With PDI	8		
<b>Pipe Size</b>			
3"	24		