



Features

- 3.0 micron element
- High flow with minimal pressure drop
- 1.0 PSI ΔP at 1200 scfm
- Manual drain standard; float drain available

Operating Specifications

Port Sizes: 3"
Thread Styles: NPT, BSPT, BSPP
Flow Capacity: 1200 SCFM @ 100 PSI
Bowl Types: Aluminum
Maximum Temperature: 175°F
Maximum Pressure: 200 PSIG
Filter Capacity: 3.0 Micron
Differential Pressure: < 1.0 PSI ΔP at Rated Flow

Materials of Construction

Housing: Aluminum
Stud: Stainless Steel
Pressure Drop Indicator: Nylon
Seals: Buna-N (fluorocarbon available)
Element: Aluminum and Stainless Steel
Assembly Screws: Black Oxide Plated Steel
Drain (20-404): Anodized Aluminum, Acetal, and Stainless Steel



Manual Drain




Automatic Drain

Replacement Parts

Bowl O-Ring (1200): 24001
Float Drain: 20-404
Replacement Element: 29001
Manual Drain: 29002

Dimensions

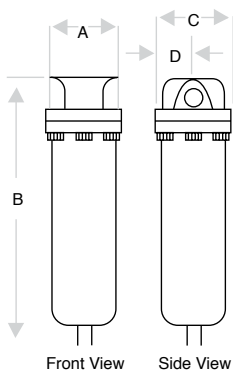

Metal Bowl, Manual Drain
A: 8.0 B: 39.5 C: 8.0 D: 4.0

Metal Bowl, Float Drain
A: 8.0 B: 45.0 C: 8.0 D: 4.0

Ordering Information

201-9202-24F

OPTIONS

Drain

Manual (Standard)	Blank
Float (External)	F

Pressure Drop Indicator

No PDI	0
Pressure Drop Indicator	8

Pipe Size

3"	24
----	----