



Features


- Coalescing filter and regulator consolidated into one assembly
- Reduces footprint of air prep assembly
- Polycarbonate or aluminum bonnets available
- Polycarbonate or aluminum bowls available
- Manual or Impulse drains available
- Preset and Tamperproof options
- Gauges available
- Available w/ 0.3 or 0.01 Micron elements
- Body cones green anodized as standard (other colors available)

Operating Specifications

- Bowl Capacity:** 1 oz.
Maximum Pressure Ratings:
 - Metal Bowl: 250 PSI
 - Polycarbonate Bowl: 150 PSI
Temperature Ratings: - Metal Bowl: 0-200°F
 - Polycarbonate Bowl: 0-120°F

Accessories & Kits


- Elements:** - 0.3 Micron: 23543 - 0.01 Micron: 23592
Regulator Repair Kits:
 - Relieving: 13532 - Non-Relieving: 13533
Bowl Kit w/ Manual Drain:
 - Polycarbonate: 23520 - Aluminum: 23533
Bowl Kit w/ Impulse Drain:
 - Polycarbonate: 23521 - Aluminum: 23534
Bracket Kit: - Polycarbonate Bonnet: 13536
 - Aluminum Bonnet: 13534
Mounting Nut Only: - Polycarbonate Bonnet: 13133
 - Aluminum Bonnet: 13025




Materials of Construction

- Body:** Anodized Machined Aluminum
Bonnet: Machined Aluminum or Polycarbonate
Spring: Stainless Steel
Diaphragm Gasket: Stainless Steel
Valve Seat: Brass
Poppet Valve: Buna-N (fluorocarbon available)
Element (0.3 and 0.01 Micron): Borosilicate Glass Fiber
Element Retainer: Celanese
Element Shield: Polycarbonate
Adaptor Outlet: Machined Aluminum (Impulse Drain)
Seat: Nylon
Piston Spring: Stainless Steel
Valve Seat: Buna-N (fluorocarbon available)
Drain: • Manual: Zinc Plated Brass
 • Impulse: Machined Aluminum and Zinc Plated Steel

Flow Characteristics

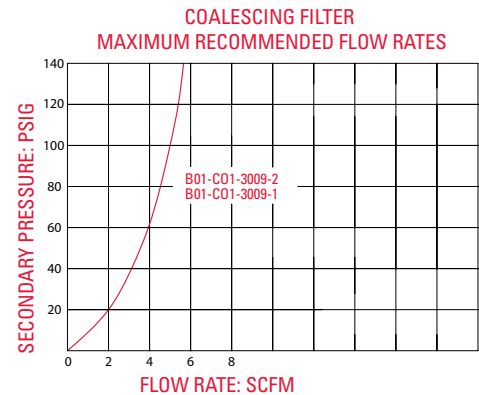

Dimensions

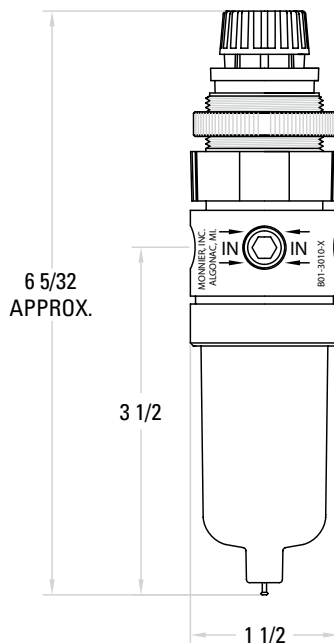

Ordering Information

B01-3009-2

Bonnet		Bowl Type		Pressure		Elements		Pipe Size		OPTIONS	
Polycarbonate	B	Polycarbonate	0	10-130 Relieving	0	0.3 Micron	9	1/8"	1	Anodizing	
Aluminum	C	Polycarbonate w/ Bowl Guard	1	10-130 Non-Relieving	1	0.01 Micron	8	1/4"	2	Green (Standard)	Blank
		Metal	2	5-60 Relieving	2					Blue	A1
				5-60 Non-Relieving	3					Black	A2
				3-30 Relieving	4					Clear	A3
				3-30 Non-Relieving	5					Red	A5
				20-250 Relieving (Aluminum Bonnet Only)	6					Yellow	A6
				20-250 Non-Relieving (Aluminum Bonnet Only)	7					Gold	A7
				1-10 Relieving	8					Purple	A8
				1-10 Non-Relieving	9					Drain	
										Manua (Standard)	Blank
										Impulse	D
										Seals	
										Buna-N (Standard)	Blank
										Fluorocarbon	V
										Tamperproof	
										Tamperproof	T
										Preset	P
										Preset and Tamperproof B01	PT
										Preset and Tamperproof C01	PTS
										Attachment Parts	
										Bracket	B
										Gauge	G
										Knob	K